

Technical Specifications

MODEL	HILS55205 (55")	HILS65205 (65")	HILS75205 (75")	HILS86205 (86")
LED Display				
Active Screen Size	54.64 inches(1387.8mm)	64.53 inches(1639.1mm)	74.52 inches(1892.7mm)	85.60 inches(2174.3 mm)
Aspect Ratio	16 : 9	16 : 9	16 : 9	16 : 9
Pixel Format	3840×2160	3840×2160	3840×2160	3840×2160
Pixel Pitch	0.315 mm x 0.315 mm	0.372 mm x 0.372 mm	0.429 mm x 0.429 mm	0.4935 mm x 0.4935 mm
Brightness	350cd/m ² (Typ.)	350cd/m ² (Typ.)	350cd/m ² (Typ.)	350cd/m ² (Typ.)
Contrast Ratio	1300:1 (Typ.)	1300:1 (Typ.)	1200:1 (Typ.)	1200:1 (Typ.)
Backlight Unit	D-LED type	D-LED type	D-LED type	D-LED type
Color Depth	10-bit(D), 1.07 Billion colors	10-bit(D), 1.07 Billion colors	10-bit(D), 1.07 Billion colors	10-bit(D), 1.07 Billion colors
Refresh Rate	60hz	60hz	60hz	60hz
Viewing Angle (CR>10)	(R/L 178 (Min.), U/D 178 (Min.))	(R/L 178 (Min.), U/D 178 (Min.))	(R/L 178 (Min.), U/D 178 (Min.))	(R/L 178 (Min.), U/D 178 (Min.))
Touch Panel				
Touch Technology	IR (USIR-UltraSlim Infrared Ray)	IR (USIR-UltraSlim Infrared Ray)	IR (USIR-UltraSlim Infrared Ray)	IR (USIR-UltraSlim Infrared Ray)
Detect Area	1209.6(H) x 680.4(V) mm	1428.5(H) x 803.5(V) mm	1649.6(H) x 927.9(V) mm	1895.8(H) x 1066.7(V)mm
Touch Point	20 points (Windows) 10 Points (Built-in Whiteboard software), Up to 20 Points	20 points (Windows) 10 Points (Built-in Whiteboard software), Up to 20 Points	20 points (Windows) 10 Points (Built-in Whiteboard software), Up to 20 Points	20 points (Windows) 10 Points (Built-in Whiteboard software), Up to 20 Points
Touch Tool	2 Points (Mac with driver software)	2 Points (Mac with driver software)	2 Points (Mac with driver software)	2 Points (Mac with driver software)
Touch Tool	Hand or other Solid Object (Pen tip >φ2.0mm)	Hand or other Solid Object (Pen tip >φ2.0mm)	Hand or other Solid Object (Pen tip >φ2.0mm)	Hand or other Solid Object (Pen tip >φ2.0mm)
Response Speed	<8 ms (1 Touch)	<8 ms (1 Touch)	<9 ms (1 Touch)	<11 ms (1 Touch)
Accuracy	±1 mm	±1 mm	±1 mm	±1 mm
Operation System	Windows 7,8,10 /Mac 10.10-10.14	Windows 7,8,10 /Mac 10.10-10.14	Windows 7,8,10 /Mac 10.10-10.14	Windows 7,8,10 /Mac 10.10-10.14
I/O Port				
Front (Input)	HDMI×1, USB×1, USB (For Touch)×1	HDMI×1, USB×1, USB (For Touch)×1	HDMI×1, USB×1, USB (For Touch)×1	HDMI×1, USB×1, USB (For Touch)×1
Rear (Input)	HDMI×3, DP×1, VGA×1, PC Audio-In×1, MIC In USB(Camera Input), USB×3, USB (For Touch)×2	HDMI×3, DP×1, VGA×1, PC Audio-In×1, MIC In USB(Camera Input), USB×3, USB (For Touch)×2	HDMI×3, DP×1, VGA×1, PC Audio-In×1, MIC In USB(Camera Input), USB×3, USB (For Touch)×2	HDMI×3, DP×1, VGA×1, PC Audio-In×1, MIC In USB(Camera Input), USB×3, USB (For Touch)×2
Rear (Output)	HDMI out×1, Earphone×1	HDMI out×1, Earphone×1	HDMI out×1, Earphone×1	HDMI out×1, Earphone×1
Communication Port	RS232 (D-sub 9-Pin), LAN(RJ45)	RS232 (D-sub 9-Pin), LAN(RJ45)	RS232 (D-sub 9-Pin), LAN(RJ45)	RS232 (D-sub 9-Pin), LAN(RJ45)
LED OPS (Optional) Display				
OPS	OPS Slot Only (Intel Standard)	OPS Slot Only (Intel Standard)	OPS Slot Only (Intel Standard)	OPS Slot Only (Intel Standard)
Others				
Front Button	Power On/Off	Power On/Off	Power On/Off	Power On/Off
Front Button	7-Function key for Source, Menu, Menu Up/Down, Vol. Up/Down, Touch On/Off	7-Function key for Source, Menu, Menu Up/Down, Vol. Up/Down, Touch On/Off	7-Function key for Source, Menu, Menu Up/Down, Vol. Up/Down, Touch On/Off	7-Function key for Source, Menu, Menu Up/Down, Vol. Up/Down, Touch On/Off
OSD Control Function	RS232C, IR Remote controller	RS232C, IR Remote controller	RS232C, IR Remote controller	RS232C, IR Remote controller
OSD Language	Japanese/Swedish/Russian/Portuguese/Polish/ Norwegian/ Italian/Greek/German/French/Dutch/ Danish/Czech/Chinese (Traditional, Simple)/ English(US, UK)/Finnish/Turkish/Arabic/Spanish/ Korean/Hungarian	Japanese/Swedish/Russian/Portuguese/Polish/ Norwegian/ Italian/Greek/German/French/Dutch/ Danish/Czech/Chinese (Traditional, Simple)/ English(US, UK)/Finnish/Turkish/Arabic/Spanish/ Korean/Hungarian	Japanese/Swedish/Russian/Portuguese/Polish/ Norwegian/ Italian/Greek/German/French/Dutch/ Danish/Czech/Chinese (Traditional, Simple)/ English(US, UK)/Finnish/Turkish/Arabic/Spanish/ Korean/Hungarian	Japanese/Swedish/Russian/Portuguese/Polish/ Norwegian/Italian/Greek/German/French/Dutch/ Danish/Czech/Chinese (Traditional, Simple)/ English(US, UK)/Finnish/Turkish/Arabic/Spanish/ Korean/Hungarian
Speaker Output	20W×2 with woofer	20W×2 with woofer	20W×2 with woofer	20W×2 with woofer
Safety Standard	CB, CE, FCC, NRTL, KC, RoHS	CB, CE, FCC, NRTL, KC, RoHS	CB, CE, FCC, NRTL, KC, RoHS	CB, CE, FCC, NRTL, KC, RoHS
Power Supply	AC100-240V, 50/60 Hz Standby Power Consumption ≤ 0.5W	AC100-240V, 50/60 Hz Standby Power Consumption ≤ 0.5W	AC100-240V, 50/60 Hz Standby Power Consumption ≤ 0.5W	AC100-240V, 50/60 Hz Standby Power Consumption ≤ 0.5W
Power Consumption	≤ 200W	≤ 280W	≤ 300W	≤ 350W
Glass Thickness	4mm(Anti-Glare)	4mm(Anti-Glare)	4mm(Anti-Glare)	4mm(Anti-Glare)
Operating Temperature	0 ~ 40°C, 20% to 80% RH (no condensation)	0 ~ 40°C, 20% to 80% RH (no condensation)	0 ~ 40°C, 20% to 80% RH (no condensation)	0 ~ 40°C, 20% to 80% RH (no condensation)
Storage Temperature	- 20 ~ 60° C	- 20 ~ 60° C	- 20 ~ 60° C	- 20 ~ 60° C
Penray	Optional	Optional	Optional	Optional
Dimension (WxHxD)	1280 x 820 x 91 mm (± 5mm)	1489 x 930 x 92 mm (± 5mm)	1717 x 1061 x 112 mm (± 5mm)	1963 x 1199 x 112mm (± 5mm)
VESA Mount	400 x 300 (mm), M8 Screw	600 x 400 (mm), M8 Screw	600 x 400 (mm), M8 Screw	800 x 400 (mm), M8 Screw
Net Weight	35 Kg	45 Kg	62 Kg	79 Kg
Gross Weight	43 Kg	54 Kg	74 Kg	93 Kg

- Design and specifications are subject to change without notice. • Microsoft, Encarta, MSN and Windows are either registered trademarks of trademarks of Microsoft Corporation in the United States and/or other countries.
- MAC OS® is registered trademark of Apple Inc. • HDMI, High-Definition Multimedia Interface and the HDM logo are trademarks of registered trademarks of HDMI Licensing, LLC in the United States and/or other countries.
- All other trademarks and registered trademarks are the property of their respective owners in the United States and/or other countries. *Refer to hitachi.com.au/dps/support for full warranty terms and conditions.


Hitachi Australia Pty Ltd

Suite 801, Level 8, 123 Epping Road North Ryde NSW 2113 02 9888 4100 dps@hitachi.com.au Hitachi.com.au/dps

HITACHI

Inspire the Next

UHD Interactive Flat Panel Displays

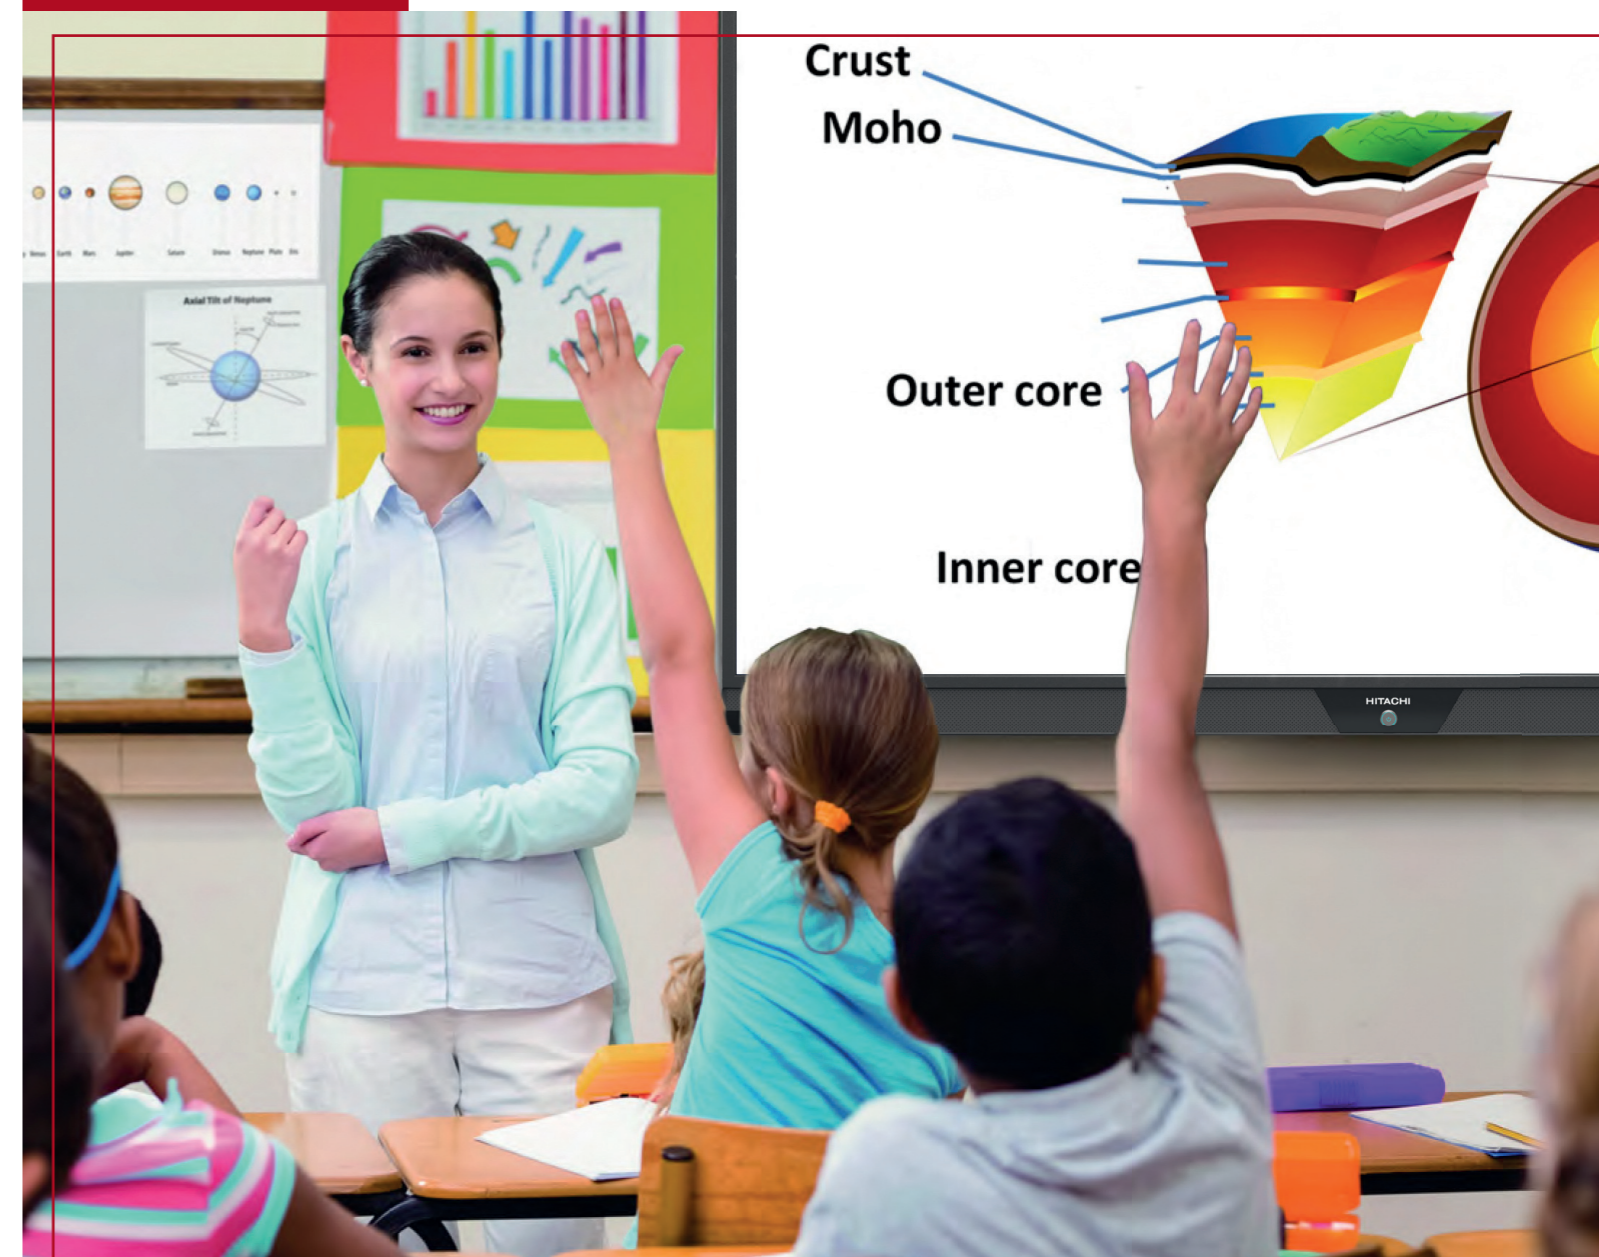

UHD Interactive Flat Panel Displays



ULTRA SLIM IR Technology

- Realistic Writing Response
- Faster touch response
- Small, fine character functionality



20 Touch Points

- Simultaneous multi-point use
- Multi-point functionality



Ultra High Definition

- 4K Clarity
- Displays crisp, clear detailed images



Built-in Operating System

- PC free operation
- Convenient and flexible applications
- 32GB internal storage



Convenient Front and Rear Inputs

- 4 x HDMI inputs (customisable)
- 1 x HDMI out
- Multiple USB inputs
- OPS slot



Built-in Sound Bar

- High power output of 20W x 2
- Built in Sub Woofer



Bidirectional Screen Mirroring

- Share, touch and manipulate graphics between Wi-Fi linked devices and screens
- Dual Wi-Fi function for internet connection



Annotation & Whiteboard Features

- Annotate over the top of graphics
- Screen operates as an interactive whiteboard
- Save and email annotated screen



Eye protection function

- Brightness automatically adjusts during user interaction for vision protection



Schedule Power On/Off Setting

- Date, hour and minute scheduling




Simple Touch On/Off

- Disable the touch functionality when required




Comprehensive Warranty

- Five year *On-Site warranty

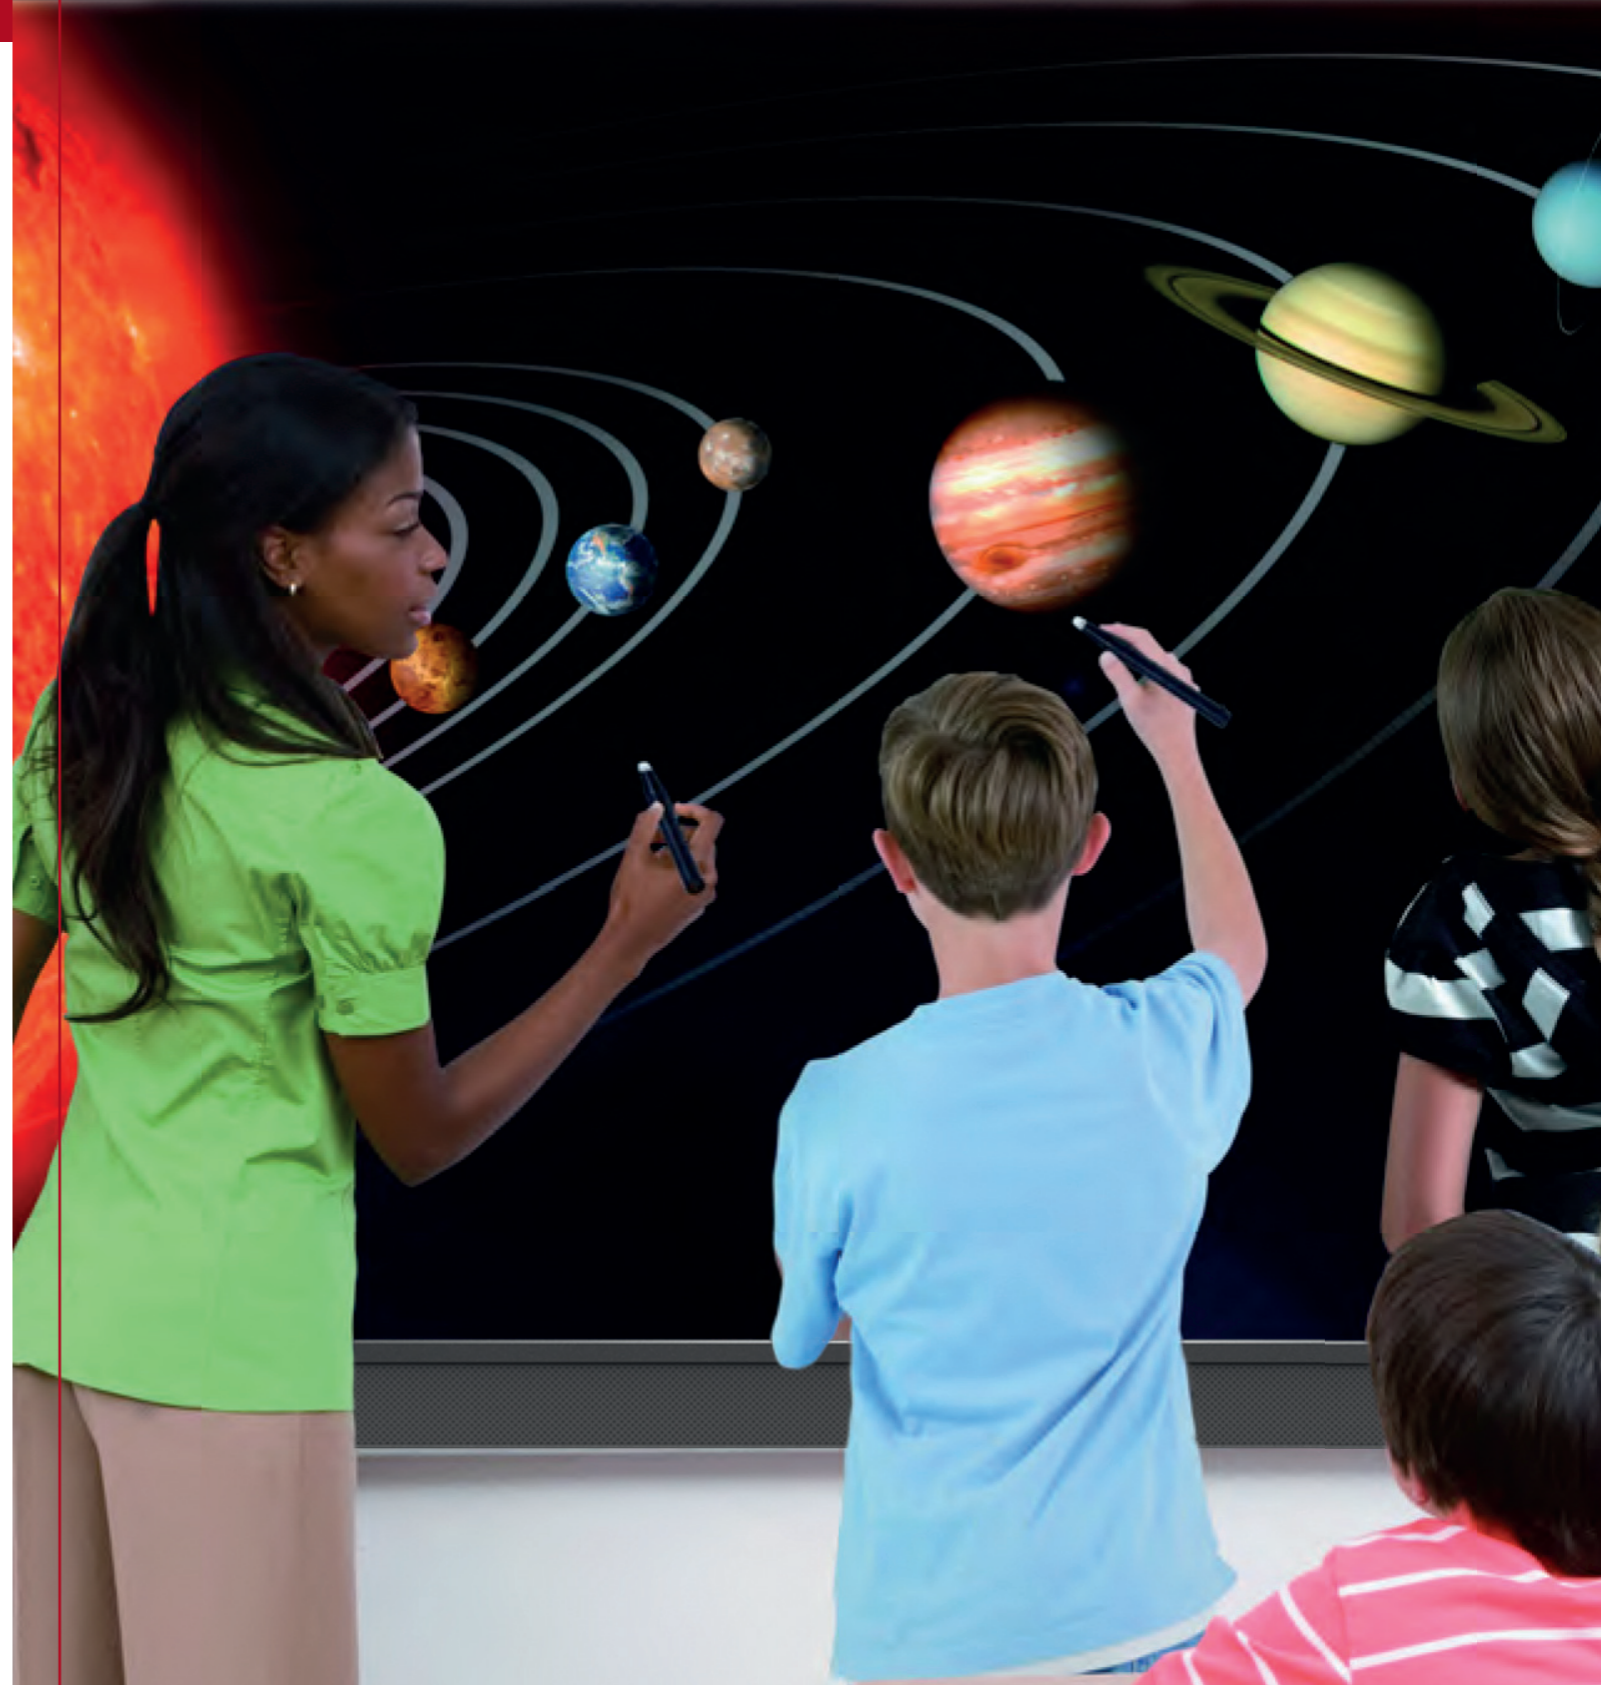

Available in 55", 65", 75" and 86" Displays

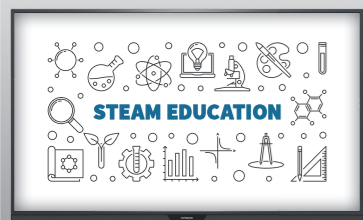

55 inch UHD Interactive Flat Panel Display



65 inch UHD Interactive Flat Panel Display



75 inch UHD Interactive Flat Panel Display



86 inch UHD Interactive Flat Panel Display

HITACHI
Inspire the Next