




commBOX Interactive Classic



Wall Bracket

CommBox Wall Brackets come in two sizes to suit all model ranges. The two sizes available are for 55-80" and 60-103" screens. Longer and stronger than normal TV mounts.



Mobile Stand

A Mobile Stand to suit CommBox 55" - 103" Interactive and Display made of heavy duty powder coated stainless steel.



Motorised Stand

Complement your CommBox 55" to 90" Interactive or Display with our stylish motorised stand. Featuring dual PDU and NUC mounting holes, builtin cable management and laptop shelf, it is sure to meet all of your needs.



Tilt Trolley

A robust trolley that allows you to raise and lower the screen as well as tilt into a fully flat table top. The Tilt Trolley is extremely stable and designed to fit through doorways with 100mm casters for easy movement. Suitable for screens up to 75" in both Interactive and Display.



i3, i5 & i7 New Generation 6 Mini PCs

A revolution in ultra-compact device design, a fully scalable computing solution in the smallest possible form factor. Perfect for use with CommBox Interactive and Lecterns products.

Sound Bar

The CommBox Sound Bar is the latest accessory to the CommBox Classic Interactive touchscreen range. The sound bar connects directly to the 2x 15W amplified speaker output of the touchscreen, using the supplied speaker cables.



Available in 60", 70" 80", 90" & 103" 4K

The Classic Range of touchscreens remains Australia's favourite classroom touchscreen. Classic good looks, including a sturdy aluminium frame, toughened glass and rock-solid reliability makes the Classic Range a winner every time.



Impressive from all Angles

All Classic touchscreens incorporate the highest quality Commercial Grade LED displays, rewarding the audience with superior image quality, excellent viewing angles and brightness. Paired with CommBox Glide™ technology, they provide unmatched visibility from all angles.



A Smarter Investment

By utilising only the highest quality components, a CommBox Touchscreen has a 17 year life expectancy and does not require maintenance.



A Design Statement

CommBox has invested heavily in the research and development of interactive touchscreens, and the aesthetic design principle reflects this with modern, sleek, and quality finishes. The Classic touchscreen's streamline frame and stylish look makes a statement in any room.





Plug & Play

Connect a Windows PC, Mac or laptop and interact immediately; no drivers or calibration required. CommBox Interactive touchscreens are truly plug & play. A Classic touchscreen comes ready to use straight out of the box, reducing installation time and costs.




Leading Touch Technology


CommBox utilises combined camera (optical) and infra-red touch technologies guaranteeing that the Classic touchscreens are ultra-responsive and highly accurate. All CommBox touchscreens provide the ultimate Windows 8 & 10 touch experience with active borders, multi-touch capabilities and gesture support.

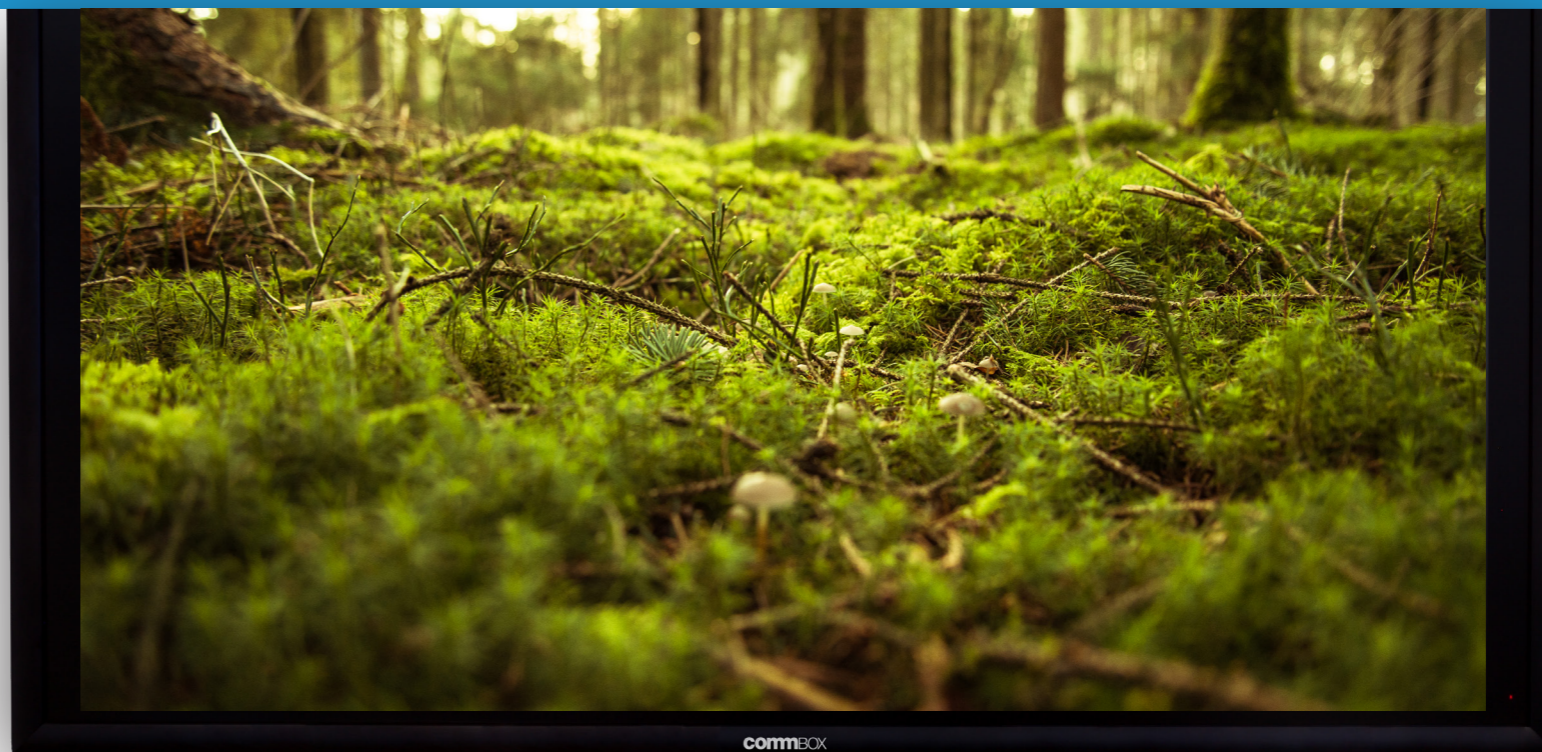


CB3060L-4NG




CB3070L-4NG4K



CB3080L-4NG4K



CB3090L-4NG4K




CB30103L-4NG4K



Experience 4K Ultra HD

The Classic range provides superior resolution for 70", 80", 90" and 103" models at 3840 x 2160. With ultra sharp graphics and text, your presentations will create a lasting impression.

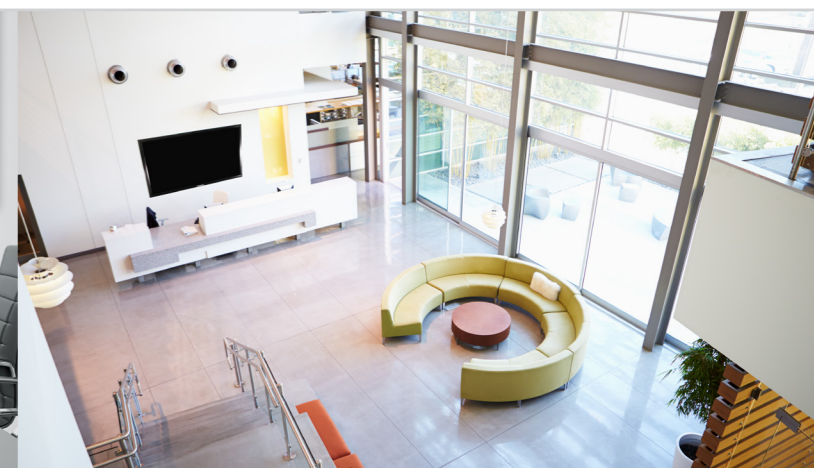

commBOX Interactive Classic Specs

Models					
SKU	Classic 60 CB3060L-4NG4K	Classic 70 CB3070L-4NG4K	Classic 80 CB3080L-4NG4K	Classic 90 CB3090L-4NG4K	Classic 103 CB30103L-4NG4K
Screen					
Resolution	UD 3840x2160 @60Hz	UD 3840x2160 @60Hz	UD 3840x2160 @60Hz	UD 3840x2160 @60Hz	UD 3840x2160 @60Hz
Brightness	450cd / m2	450cd / m2	450cd / m2	350cd / m2	500cd / m2
Viewing Angle	178'	178'	178'	178'	178'
Noise	Below 40dB 25C	Below 40dB 25C	Below 40dB 25C	Below 40dB 25C	Below 40dB 25C
Surface Temp	Below 10 at 24C	Below 10 at 24C	Below 10 at 24C	Below 10 at 24C	Below 10 at 24C
Operating Con	5C to 35C	5C to 35C	5C to 35C	5C to 35C	5C to 35C
Power Req	AC 100 to 240V, 50/60Hz Power Supply			AC 100 to 240V, 50/60Hz Power Supply	
Power Max	130W	260W	470W	470W	520W
Power Average	110W	240W	430W	430W	480W
Touch Points	4 (10 optional) Fingertips or any tips			4 (10 optional) Fingertips or any tips	
Touch Technology	Infra-Red & Optical			Infra-Red & Optical	
LED Display	LG Commercial Grade	LG Commercial Grade	SAMSUNG Commercial Grade	LG Commercial Grade	LG Commercial Grade
Dimensions					
Touch Area	60"	70"	80"	90"	103"
Display Area	55"	65"	75"	86"	98"
Screen	1413(W) x 838(H) x 95(D)mm	1632(W) x 959(H) x 106(D)mm	1840(W) x 1085(H) x 126(D)mm	2065(W) x 1222(H) x 125(D)mm	2345(W) x 1369(H) x 125(D)mm
Packed	1590(W) x 960(H) x 270(D)mm	1850(W) x 1100(H) x 320(D)mm	2050(W) x 1225(H) x 350(D)mm	2275(W) x 1360(H) x 400(D)mm	2600(W) x 1550(H) x 560(D)mm
Weight					
Screen	50kg	68kg	98kg	122kg	134kg
Packed	57kg	81kg	116kg	147kg	154kg
Accessories	HDMI Cable, USB Cable, Stylus Pen, Cleaning Cloth			HDMI Cable, USB Cable, Stylus Pen, Cleaning Cloth	
Speakers	15W x 2 Internal Speakers 15W x 2 Speaker Out 		15W x 2 Internal Speakers 15W x 2 Speaker Out 		
Input/Output	Input: VGA + 3.5 Stereo Audio, Component, 4 X HDMI, USB A for content, USB B for Touch, RS232 Output: Speaker 2 x 3.5 Mono, SPDIF, Line level output			Input: VGA + 3.5 Stereo Audio, Component, 4 X HDMI, USB A for content, USB B for Touch, RS232 Output: Speaker 2 x 3.5 Mono, SPDIF, Line level output	