



AV Cart 20

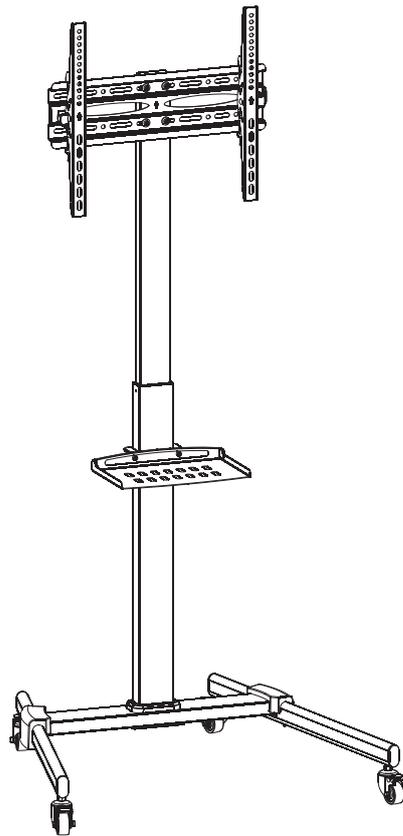

COMPONENT CHECKLIST

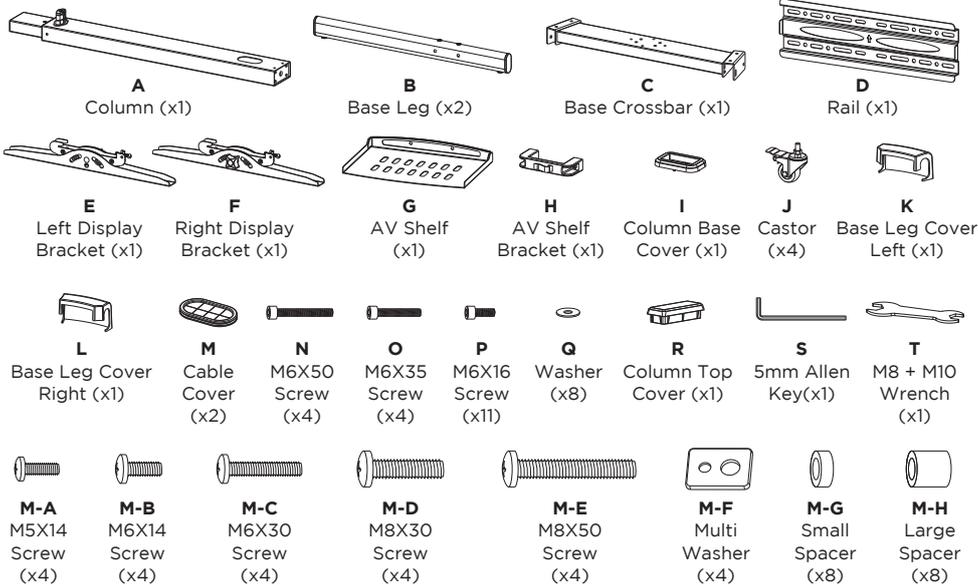

Floor 

REQUIRED TOOLS

- Phillips Head Screwdriver

CAPACITY

DISPLAY
0 - 20kg (0 - 44lb)
32" - 55"

SHELF
0 - 5kg (0 - 11lb)

IMPORTANT INFORMATION

- ! **Please ensure this product is installed as per these installation instructions.**
- ! The manufacturer accepts no responsibility for incorrect installation.
- ! Failure to assemble this product correctly may cause serious injury/death during or following installation.
- ! This product should only be installed by professional installers of good mechanical aptitude, who fully understand these instructions and the consequences of incorrect installation.
- ! Do not over tighten screws.
- ! Two person installation is recommended.
- ! Product not suitable for use outdoors.
- ! After installation is complete check to verify that AV Cart is secure and safe for use.
- ! Curved monitors, deep devices (such as all-in-one PCs), VESA mounted accessories (such as mini PC brackets and mounts), and offset VESA locations exert additional leverage that can exceed the capacity of the mount even though the monitor weight may be within the stated range. Please contact Atdec if you would like further information.
- ! **WARNING!** Death or serious injury may occur when children climb on audio and/or video equipment furniture. A remote control or toys placed on the cart may encourage a child to climb on the cart and as a result the cart may tip over on to the child.



WARNING!

- ! DO NOT ALLOW CHILDREN UNDER 16 TO PLAY WITH OR MOVE CART
- ! MOVE CART SLOWLY
- ! USE WITH DISPLAYS HEAVIER THAN SPECIFIED MAY RESULT IN INSTABILITY, TIP OVER AND RISK OF DEATH OR SERIOUS INJURY

| | | | | | | |
|-----------------------------------|--|--------------------------|-------------|--|-----------------------------|-----------------------------|
| | | | | | | |
| ONLY ADULTS SHOULD MOVE THIS CART | DO NOT APPLY MOVING FORCE ON FRONT OR BACK | NEVER APPLY FORCE AT TOP | DO NOT PULL | APPLY FORCE ON NARROW SIDES PUSH NEAR MIDDLE | LOCK BRAKES WHEN STATIONARY | UNLOCK BRAKES BEFORE MOVING |

1. Assemble base

1.1

1.2

Note: Lock brakes on castors to avoid any sudden movements during installation.

2. Extend column to maximum height

2.1

Whilst resting the base of the column on the floor, firmly hold the upper part of the column and pull the spring latch out.

2.2

Without releasing the spring latch, slide the upper part of the column out slowly.


Note: Do not attempt to pull the upper part of the column out beyond the MAX indicator.

2.3

Make sure the spring latch is fully pressed in before letting go of the upper part of the column.


3. Attach column to base

4. Finish column assembly

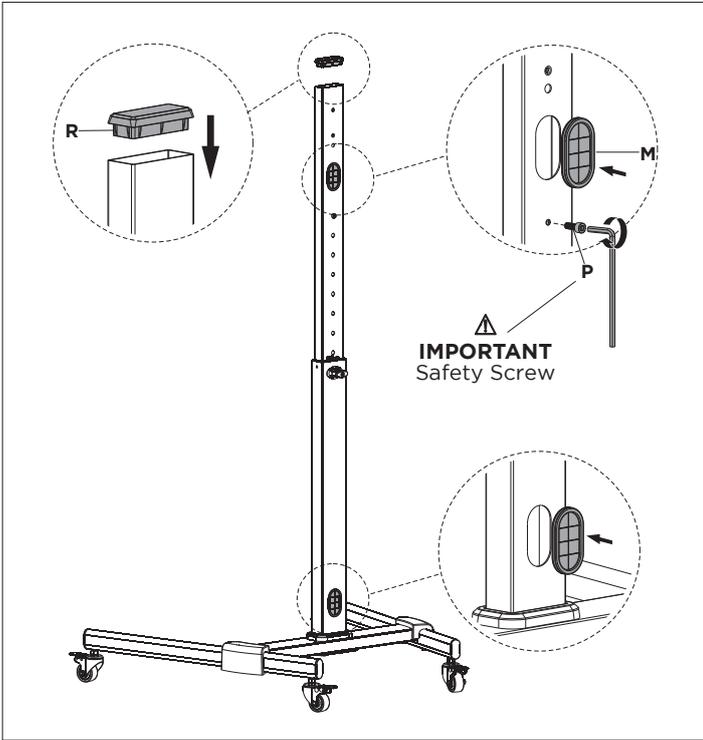


5. Attach rail to column



Note: Ensure rail is centred to column before tightening screws.

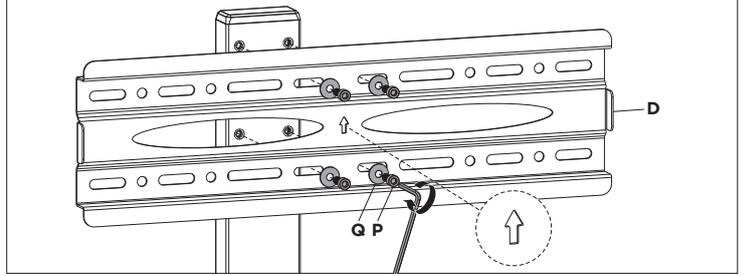

6. Attach shelf to column


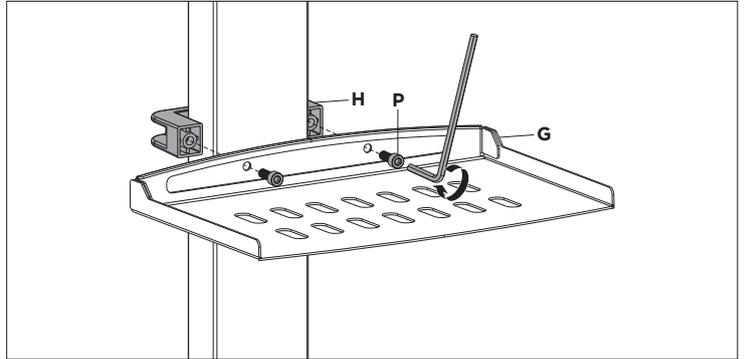


7. Attach display brackets to display




Note:

- Always use a multi washer.
- Use the shortest combination of spacers (if necessary) ensuring the display bracket is not loose and screws are not forced too deep into the display.

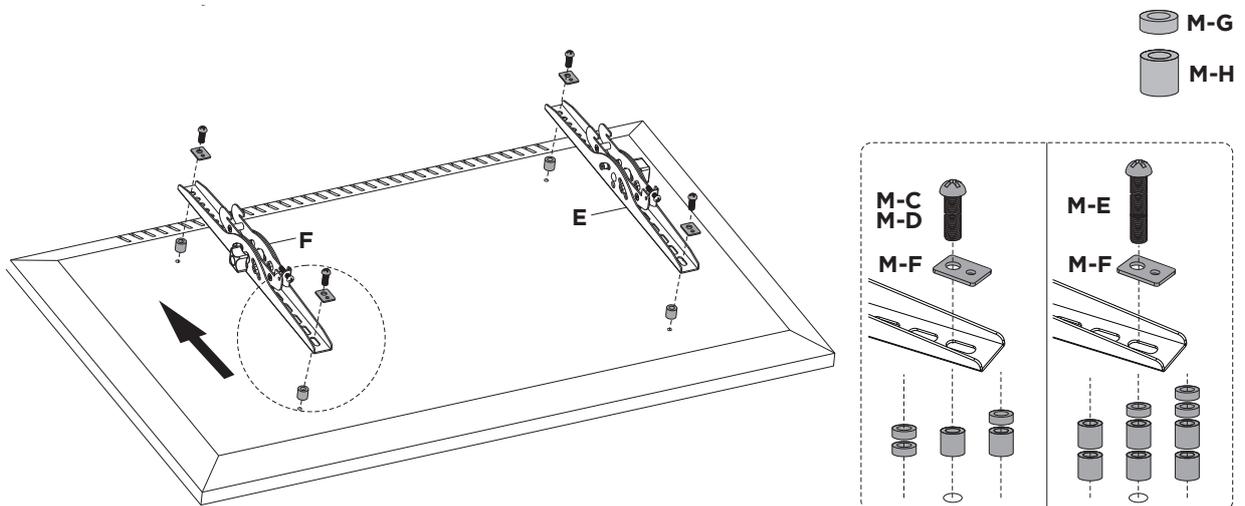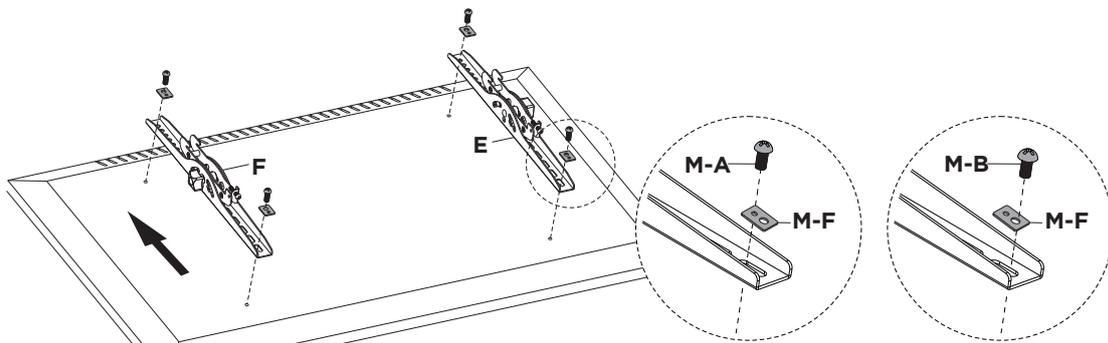


8. Mount display on rail and secure

Note: Ensure display is centred to column before tightening screws.

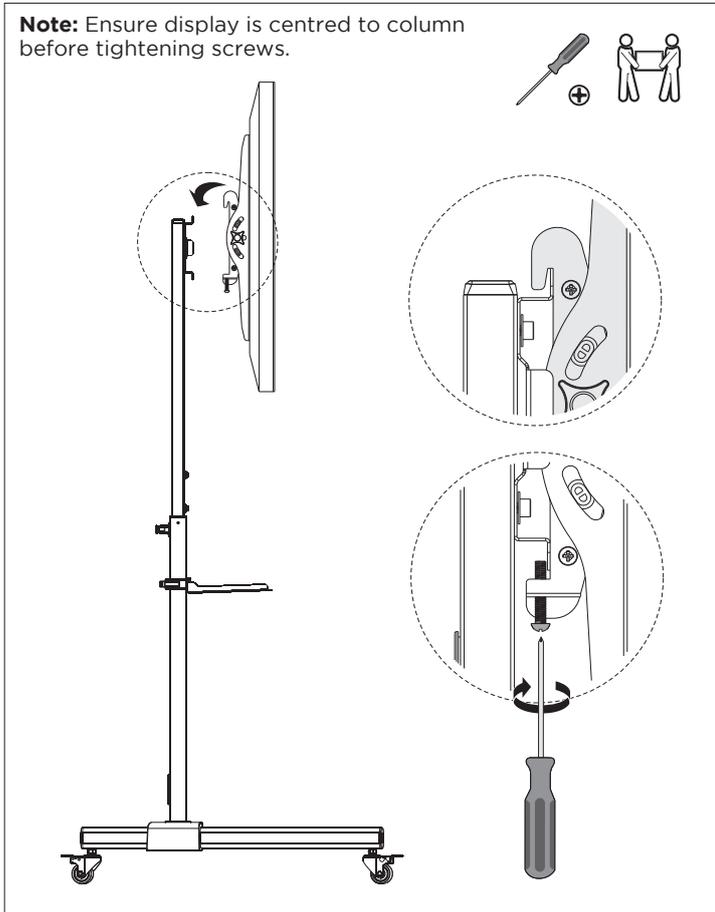


9. Route cables

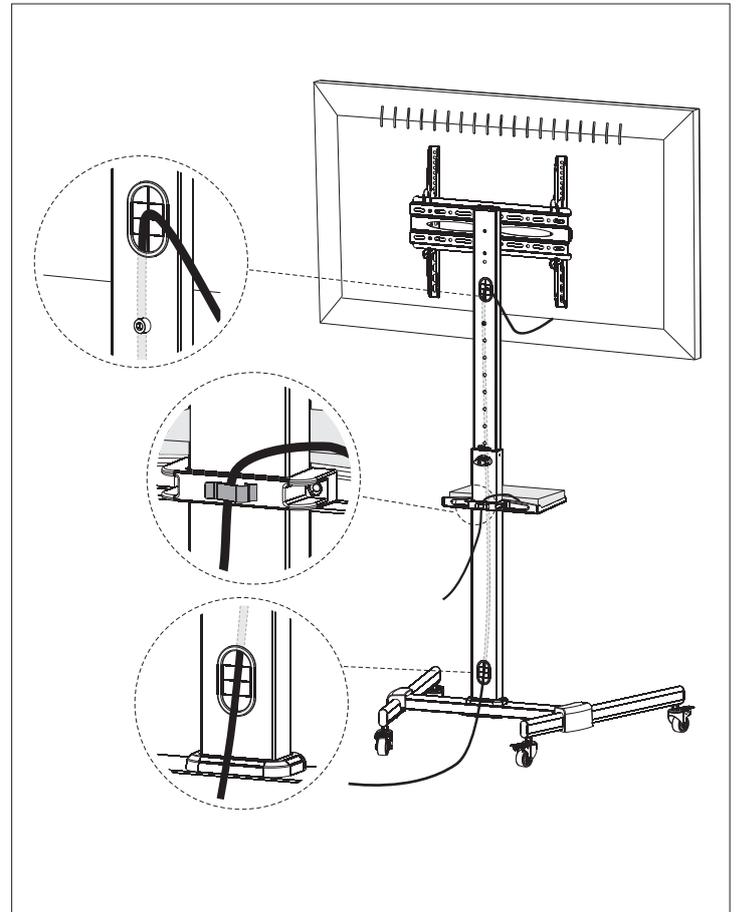


ADJUSTMENTS

Forwards/backward tilt

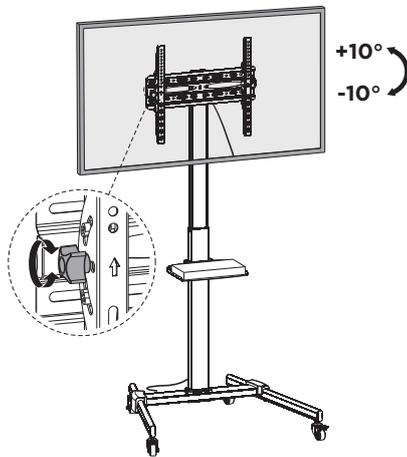

Height adjustment (see step 2)

⚠ IMPORTANT: Spring latch cannot be released with display mounted. Display **MUST** be removed prior to adjusting height.

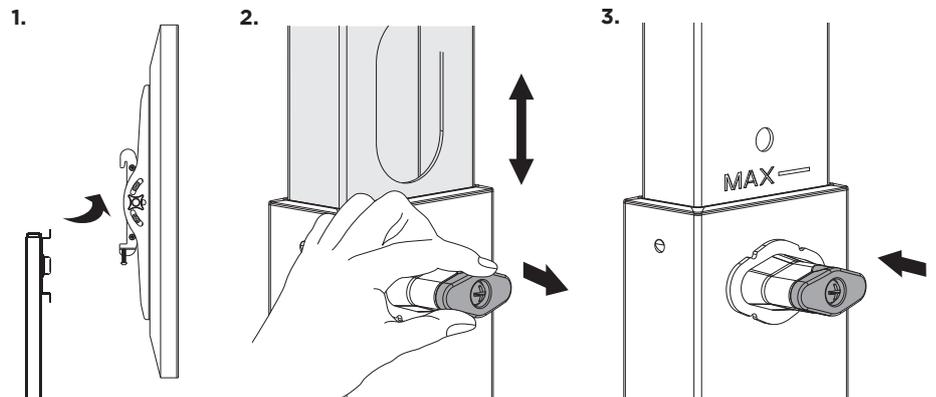

MAINTENANCE

- Tighten fasteners and check if the cart is secure and safe to use at regular intervals (at least every three months.)
- Please contact your distributor if you have any questions.