

ON-CAMERA SHOTGUN MICROPHONE

The VideoMic GO II is a compact, lightweight on-camera shotgun microphone that makes capturing incredible audio incredibly easy. It features both an $\,$ analog 3.5mm TRS output and a digital USB-C output for use with a camera, smartphone, or computer*, making it super versatile. Annular line tube $\,$ technology delivers crisp, clear sound for all content creation applications, and the included windshield and innovative HELIX™ isolation mount ensure your recordings are crystal-clear.

- Ultra-lightweight shotgun microphone (just 57g)
- 3.5mm TRS output for use with cameras
- Digital USB-C output for use with phones, tablets and computers*
- HELIX isolation mount
- No batteries required
- Compatible with the RØDE software suite for advanced features, including RØDE Connect and RØDE Capture



ISOLATION MOUNT



HIGHLY





DIGITAL 3.5mm TRS USB OUTPUT CONNECTION



& Android COMPATIBLE



ACOUSTIC & ELECTRICAL SPECIFICATIONS

Acoustic Principle:	Pressure gradient electret condenser
Polar Pattern:	Supercardioid
Frequency Response:	20Hz - 20kHz
Output Impedance:	2Κ2Ω
Signal to Noise Ratio:	79 dBA
Equivalent Noise (A-weighted):	15 dBA
Dynamic Range:	95 dBA Typical
Sensitivity:	-31dBV(28.78mV @ 94dB SPL) ± 1dB @ 1kHz
Max Input SPL:	110 dB SPL
Output Connections:	3.5mm TRS USB-C
Computer Connectivity:	USB-C (USB 2.0)
Simultaneous I/O:	Stereo input and output when in USB mode
Power Requirements:	3.5mm plug-in power 2 - 5V USB 5V
Bit Depth:	24-bit
Sample Rates:	48 kHz
Minimum OS Requirement:	macOS 10.15 Windows 10 (20H2) iOS 14 Android 9.0








MECHANICAL SPECIFICATIONS


WHAT'S IN THE BOX

Weight (grams):	VideoMic GO II: 33 VideoMic GO II and included accessories: 57
Dimensions	VideoMic GO II: Length: 120 Diameter: 21.6
(millimetres):	VideoMic GO II and included accessories: Length: 120 Width: 50.3 Height: 52.4
Compatible RØDE Accessories:	WS12, SC14, SC15, SC16, SC17, SC18, SC19, SC20, SC21, SC22, SC23, SC24, SC25, SC26
Compatible RØDE Software:	RØDE Connect RØDE Central RØDE Reporter RØDE Capture
Included Accessories:	1 x SC14 TRS-TRS Cable 1 x Foam Windshield 1 x HELIX Isolation Mount



DIMENSIONS



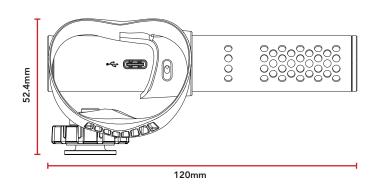

POLAR PATTERN

FREQUENCY RESPONSE

