

Video Conferencing Soundbar

Yealink MSpeaker II is specially designed for video conferencing room, to award you a better sound in a meeting room. It has two built-in speakers, providing powerful output to cover middle even large meeting room. Working with Yealink microphone and Yealink Noise Proof Technology, it brings a crystal and vivid audio experience to everyone.

MSpeaker II supports PoE, which enables simple and easy deployment, in this way, power supply, audio data transmission and signal control unifies as one, sharply reducing the complex installation procedures as well as the costly expenses. And MSpeaker II also supports 3.5mm AUX input to be compatible with more video conferencing solution.



Specifications

Audio Output

- Stereo speakers
- Frequency respond: 100Hz-20KHz
- S/N: ≥ 70 dB
- RMS: 10W

Audio Input

- 1 x VCH (RJ45), supports PoE (802.3af)
- 1 x 3.5mm Line-in

Other Interfaces

- Built-in Bluetooth (for future use)
- Power Input:
 - DC 48V/0.7A
 - PSE 54V \approx 0.56A or PoE 48V \approx 0.27A

Physical Features

- Dimension (W.D.H): 500mm x 60mm x 86mm
- Operating humidity: 5~90%
- Operating temperature: 0~40°C

Package Includes

- MSpeaker II
- Power Adapter
- 3m audio cable (3.5mm)
- Wall Mount Bracket
- Quick Start Guide


Compliance



Connection

Do one of the following to connect MSpeaker II to the video conferencing system or the UVC series camera:

1. Connect the MSpeaker II via 3.5mm audio cable

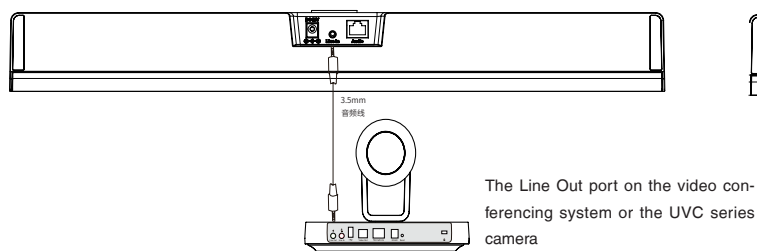

2. Connect MSpeaker II via Ethernet cable

